

## -40V,-14A P-CHANNEL POWER MOSFET

### GENERAL DESCRIPTION

The SFN4001PT4 uses advanced trench technology and design to provide excellent  $R_{DS(on)}$  with low gate charge.


It can be used in a wide variety applications.

### Features

- ◆  $V_{DS} = -40V, I_D = -14A$
- ◆  $R_{DS(on)}$   
TYP:  $31m\Omega @ V_{GS} = -10V$   
TYP:  $56m\Omega @ V_{GS} = -4.5V$

### Applications

- ◆ Power factor correction (PFC)
- ◆ Switched mode power supplies (SMPS)
- ◆ Uninterruptible power supply (UPS)
- ◆ LED lighting power

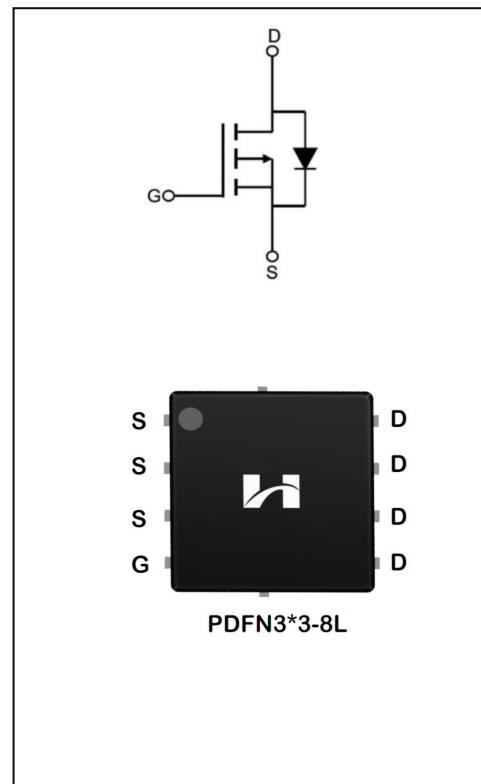

### ORDERING INFORMATION

Part No.	Package	Marking	Material	Packing
SFN4001PT4	PDFN3*3-8L	SFN4001PT4	Pb Free	Reel

ABSOLUTE MAXIMUM RATINGS ( $T_J=25^\circ\text{C}$  unless otherwise noted)

Characteristics	Symbol	Ratings	Unit
Drain-Source Voltage	$V_{DS}$	-40	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current	$I_D$	-14	A
$T_C = 100^\circ\text{C}$		-9.8	
Drain Current Pulsed(Note 1)	$I_{DM}$	-56	A
Power Dissipation( $T_C=25^\circ\text{C}$ ) -Derate above $25^\circ\text{C}$	$P_D$	23	W
		0.18	$\text{W}/^\circ\text{C}$
Single Pulsed Avalanche Energy (Note 2)	$E_{AS}$	43	mJ
Operation Junction Temperature Range	$T_J$	-55~+150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55~+150	$^\circ\text{C}$
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	TL	260	$^\circ\text{C}$

## THERMAL CHARACTERISTICS

Characteristics	Symbol	MAX	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	5.0	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	$^\circ\text{C}/\text{W}$

## ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
<b>Off Characteristics</b>						
Drain -Source Breakdown Voltage	$B_{VDSS}$	$V_{GS}=0\text{V}, I_D=-250\mu\text{A}$	-40	--	--	V
Drain-Source Leakage Current	$I_{BS}$	$V_{DS}=-40\text{V}, V_{GS}=0\text{V}$	--	--	-1	$\mu\text{A}$
Gate-Source Leakage Current	$I_{GS}$	$V_{GS}=20\text{V}, V_{DS}=0\text{V}$	--	--	100	$\text{nA}$
Gate-Source Leakage Current	$I_{GS}$	$V_{GS}=-20\text{V}, V_{DS}=0\text{V}$	--	--	-100	
<b>On Characteristics</b>						
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{GS}=V_{DS}, I_D=250\mu\text{A}$	-1.2	-1.8	-2.2	V
Static Drain- Source On State Resistance	$R_{DS(\text{on})}$	$V_{GS}=-10\text{V}, I_D=-7\text{A}$	--	31	40	$\text{m}\Omega$
		$V_{GS}=-4.5\text{V}, I_D=-5\text{A}$	--	56	65	
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{iss}$	$V_{DS}=-20\text{V}$	--	1207	--	$\text{pF}$
Output Capacitance	$C_{oss}$		--	92.3	--	
Reverse Transfer Capacitance	$C_{rss}$		f=1.0MHz	--	76.7	
<b>Switching Characteristics</b>						
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=-10\text{V}, V_{GS}=-5\text{V}$ $R_G=3.3\Omega, I_D=-8\text{A}$ (Note 3.4)	--	9.6	--	ns
Turn-on Rise Time	$t_r$		--	8.7	--	
Turn-off Delay Time	$t_{d(off)}$		--	35.8	--	
Turn-off Fall Time	$t_f$		--	8.5	--	

Total Gate Charge	$Q_g$	$V_{DS}=-20V, I_D=-8A$ $V_{GS}=-10V$ (Note 3.4)	--	23.5	--	nc
Gate-Source Charge	$Q_{gs}$		--	6.3	--	
Gate-Drain Charge	$Q_{gd}$		--	8.5	--	

## SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Continuous Source Current	$I_s$	Integral Reverse P-N Junction Diode in the MOSFET	--	--	-14	A
Pulsed Source Current	$I_{SM}$		--	--	-56	
Diode Forward Voltage	$V_{SD}$	$I_s=-10A, V_{GS}=0V$	--	-0.87	-1.2	V
Reverse Recovery Time	$T_{rr}$	$I_F=-10A$	--	56	--	ns
Reverse Recovery Charge	$Q_{rr}$	$dI/dt=100A/\mu S$	--	28	--	nC

1. Pulse width limited by maximum junction temperature

2.  $L=0.5mH, V_{DD}=-20V, V_G=-10V, R_G=25\Omega$ , starting  $T_J=25^\circ C$ 3. Pulse Test: Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$ 

4. Essentially independent of operating temperature

## Typical Performance Characteristics

Figure 1. Output Characteristics

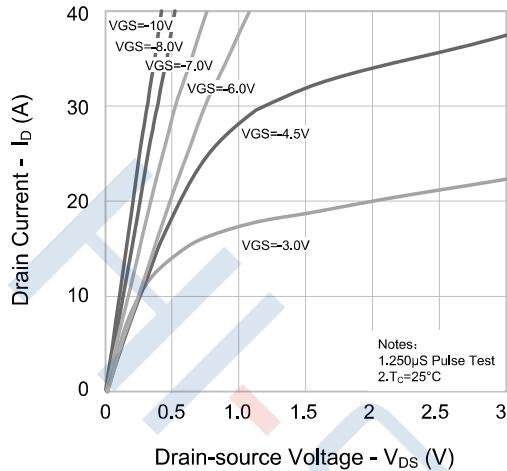


Figure 2. Transfer Characteristics

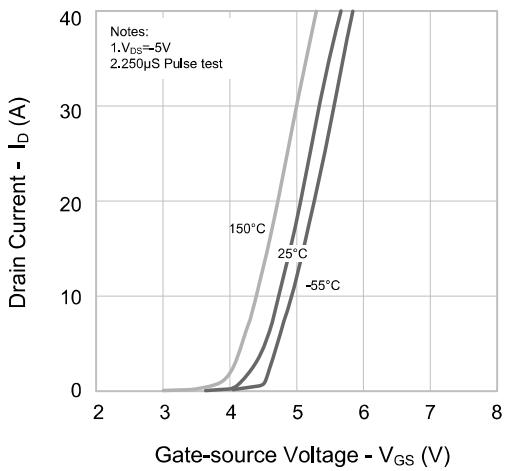


Figure 3. On-resistance vs. Drain Current

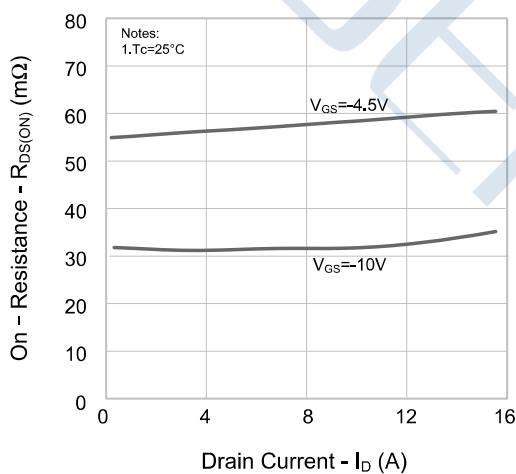


Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

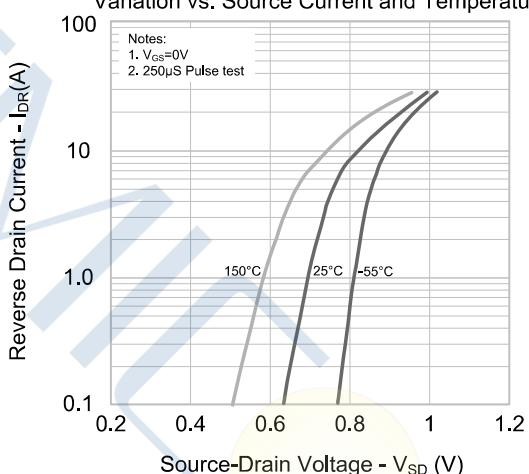


Figure 5. Capacitance Characteristics





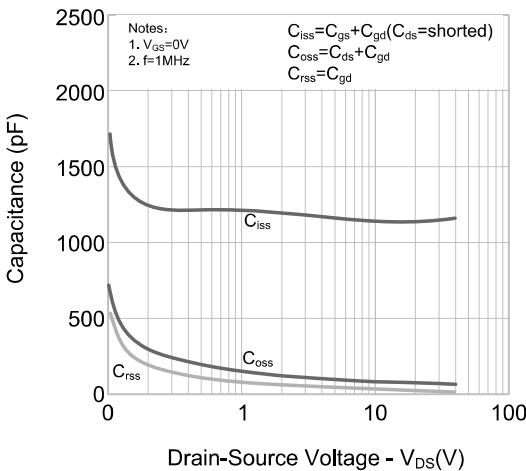



Figure 6. Gate Charge

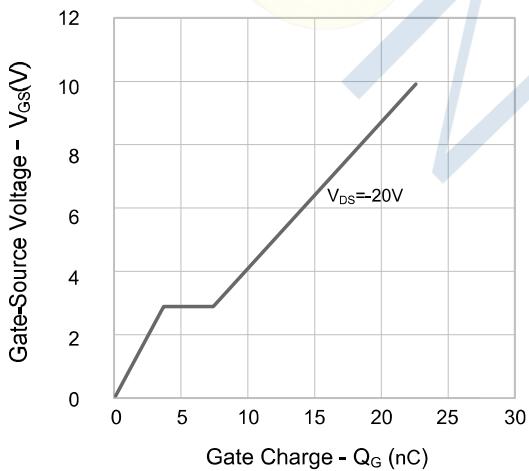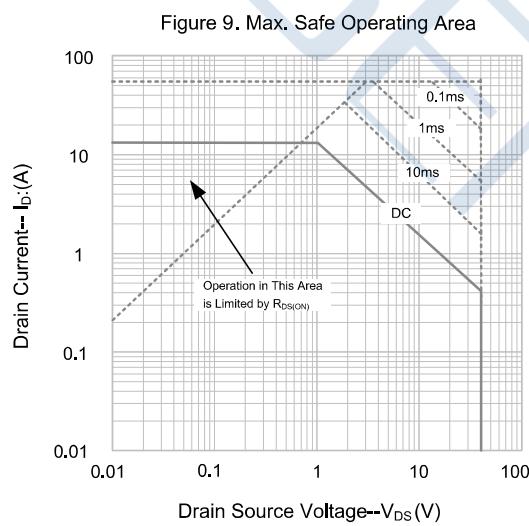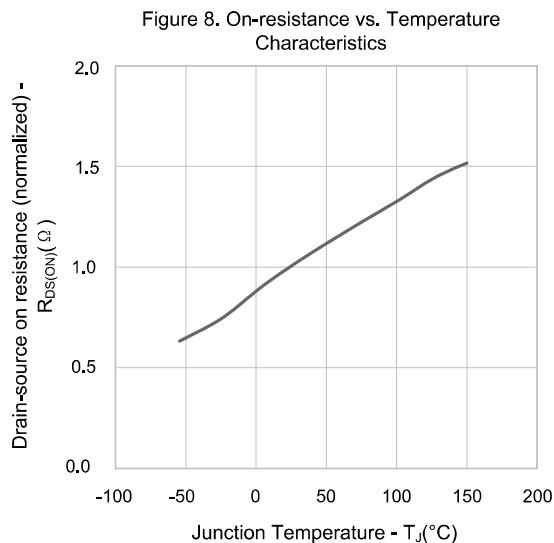


## Typical Performance Characteristics

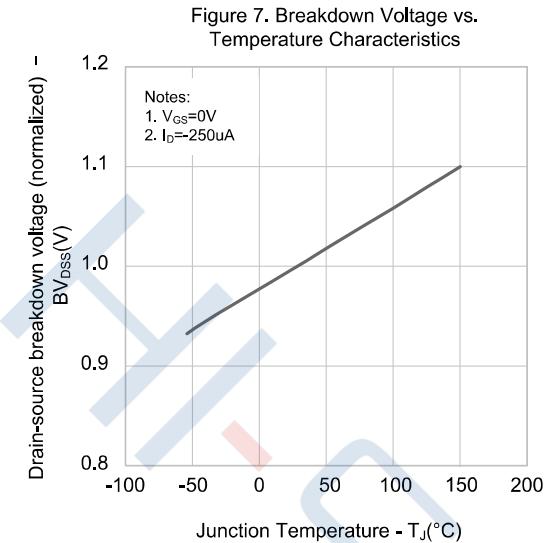


## Test Circuit

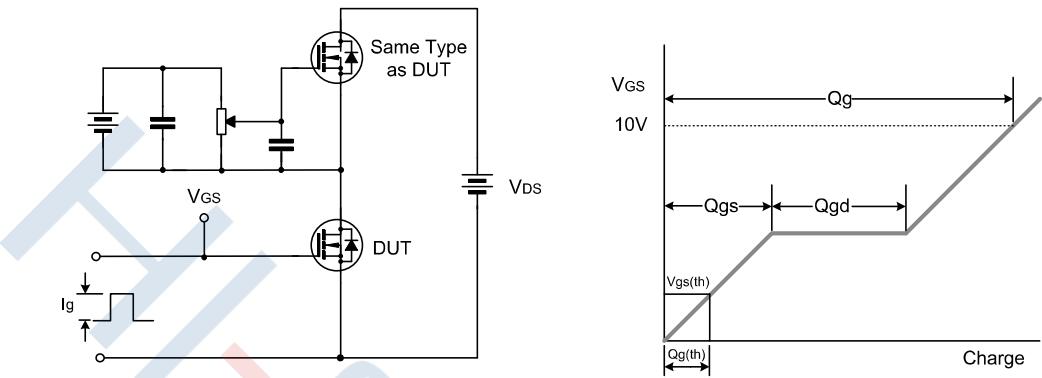

Gate Charge Test Circuit &amp; Waveform

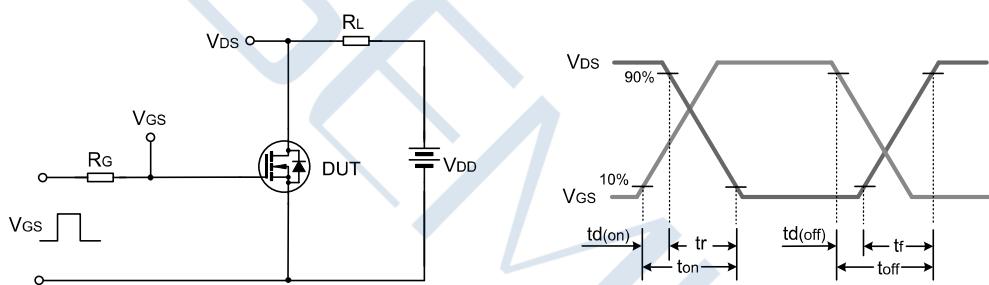


Resistive Switching Test Circuit &amp; Waveform

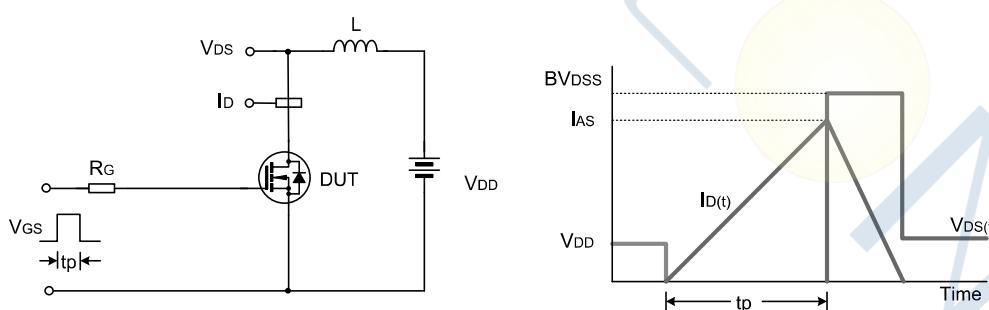

Unclamped Inductive Switching Test Circuit &amp; Waveform

## Package Dimensions of PDFN3\*3-8L

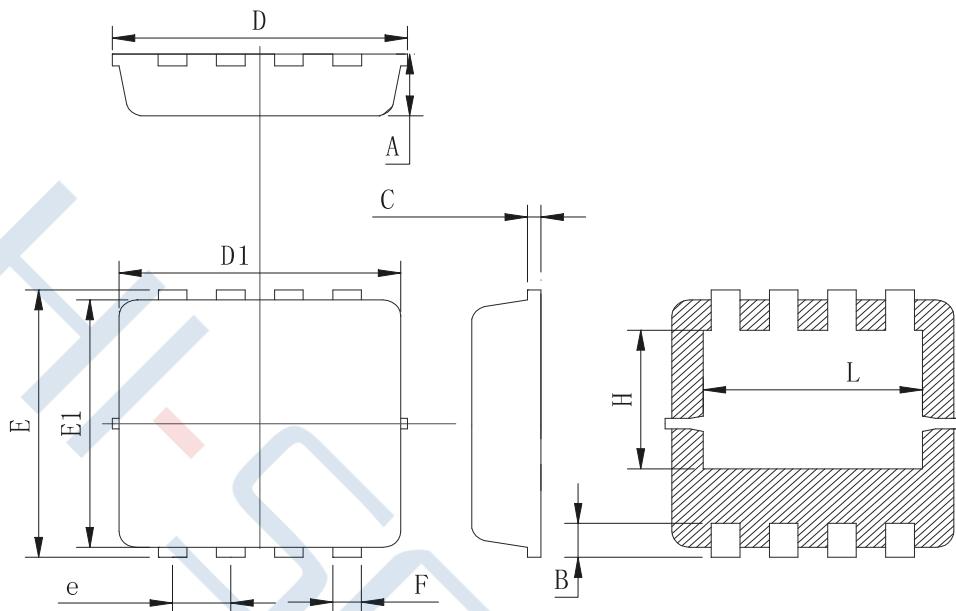

Symbol	Min	Typ	Max
A	0.725	0.775	0.825
B	0.28	0.38	0.48
C	0.13	0.15	0.20
D	3.20	3.30	3.35
D1	3.05	3.15	3.25
E	3.25	3.35	3.45
E1	3.0	3.1	3.2
e	0.60	0.65	0.70
F	0.27	0.32	0.37
H	1.63	1.73	1.83
L	2.35	2.45	2.55

**Disclaimer:**

- Hi-semicon reserves the right to make changes to the information herein for the improvement of the design and performance without further notice! Customers should obtain the latest relevant information before placing orders and should verify that such information is complete and current.
- All semiconductor products malfunction or fail with some probability under special conditions. When using Hi-semicon products in system design or complete machine manufacturing, it is the responsibility of the buyer to comply with the safety standards strictly and take essential measures to avoid situations in which a malfunction or failure of such Hi-semicon products could cause loss of body injury or damage to property.
- Hi-semicon will supply the best possible product for customers!