

-5A,-15V P-Channel Power MOSFET**GENERAL DESCRIPTION**



The Power MOSFET has extremely low on resistance, making it especially suitable for applications which require superior power density and outstanding efficiency.

Features

- ◆ $V_{DS} = -15V$, $I_D = -5A$
- ◆ $R_{DS(ON)}$
TYP: $19m\Omega @ V_{GS} = -4.5V$
TYP: $28m\Omega @ V_{GS} = -2.5V$

Applications

- ◆ Load Switch
- ◆ PWM Applications
- ◆ Power Management

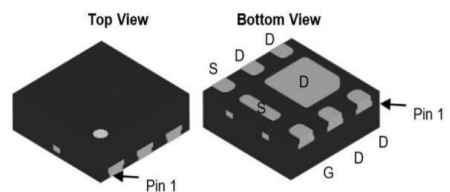**Schematic Diagram****DFN2*2-6L****ORDERING INFORMATION**

Part No.	Package	Marking	Material	Packing
SFR01505PT	DFN2*2	01505PT	Pb Free	Reel

ABSOLUTE MAXIMUM RATINGS ($T_J=25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	-15	V
Gate-Source Voltage	V_{GS}	± 12	V
Drain Current	I_D	$T_C = 25^{\circ}\text{C}$ -5	A
		$T_C = 75^{\circ}\text{C}$ -3.9	
Drain Current Pulsed(Note 1)	I_{DM}	-20	A
Power Dissipation($T_C=25^{\circ}\text{C}$) -Derate above 25°C	P_D	8.8	W
Single Pulsed Avalanche Energy (Note 2)	E_{AS}	12	mJ
Operation Junction Temperature Range	T_J	$-55\sim+150$	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	$-55\sim+150$	$^{\circ}\text{C}$
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	TL	300	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
Drain -Source Breakdown Voltage	B _V DSS	V _{GS} = 0V, I _D = -250μA	-15	--	--	V
Drain-Source Leakage Current	I _{DSS}	V _{DS} = -20V, V _{GS} = 0V	--	--	1	uA
Gate-Source Leakage Current	I _{GSS}	V _{GS} = 12V, V _{DS} = 0V	--	--	100	nA
Gate-Source Leakage Current	I _{GSS}	V _{GS} = -12V, V _{DS} = 0V	--	--	-100	
On Characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{GS} = V _{DS} , I _D = -250μA	-0.4	-0.65	-1.0	V
Static Drain- Source On State Resistance	R _{DS(on)}	V _{GS} = -4.5V, I _D = -2.5A	--	19	25	mΩ
		V _{GS} = -2.5V, I _D = -1.5A	--	28	38	
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} = -10V V _{GS} = 0V f=1.0MHZ	--	633	--	pF
Output Capacitance	C _{oss}		--	86	--	
Reverse Transfer Capacitance	C _{rss}		--	61	--	
Switching Characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DD} = -10V, V _{GS} = -4.5V R _G = 1 Ω , I _D = -3.0A (Note 3.4)	--	11.3	--	nS
Turn-on Rise Time	t _r		--	29	--	
Turn-off Delay Time	t _{d(off)}		--	48	--	
Turn-off Fall Time	t _f		--	51	--	
Total Gate Charge	Q _g	V _{DS} =-10V, I _D =-3.0A V _{GS} =-4.5V (Note 3.4)	--	9.1	--	nC
Gate-Source Charge	Q _{gs}		--	1.5	--	
Gate-Drain Charge	Q _{gd}		--	1.9	--	

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Continuous Source Current	I_S	Integral Reverse P-N Junction Diode in the MOSFET	--	--	-5	A
Pulsed Source Current	I_{SM}		--	--	-20	
Diode Forward Voltage	V_{SD}	$I_S = -5A, V_{GS} = 0V$	--	-0.86	-1.2	V

NOTE:

1. Pulse width limited by maximum junction temperature
2. $L=0.5mH$, $V_{DD}=-10V$, $V_G=-10V$, $R_G=25\Omega$, starting $T_J=25^\circ C$
3. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$
4. Essentially independent of operating temperature

Typical Performance Characteristics

Figure1: Output Characteristics

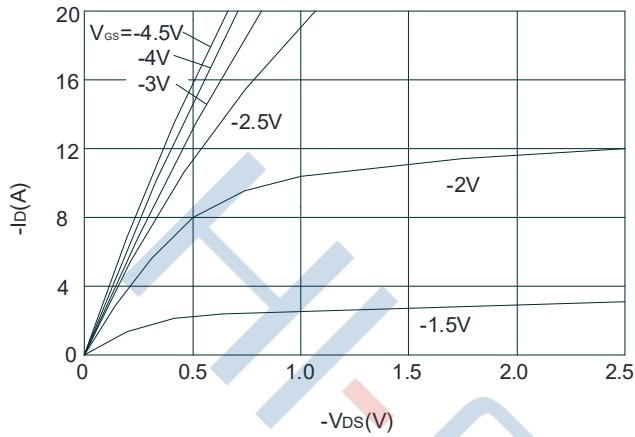


Figure 2: Typical Transfer Characteristics

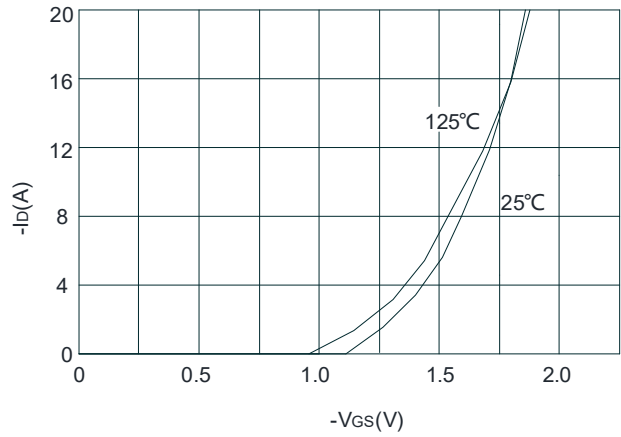


Figure 3: On-resistance vs. Drain Current

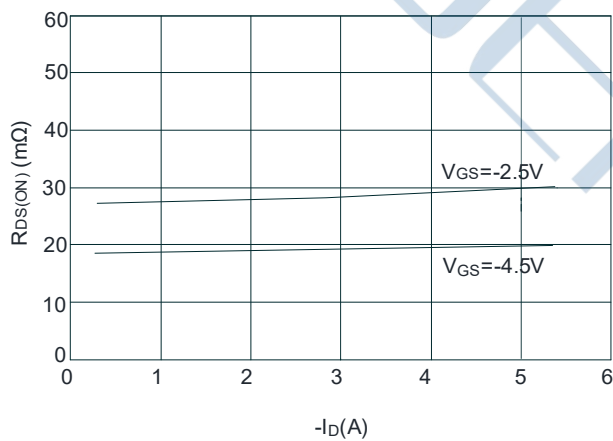


Figure 4: Body Diode Characteristics

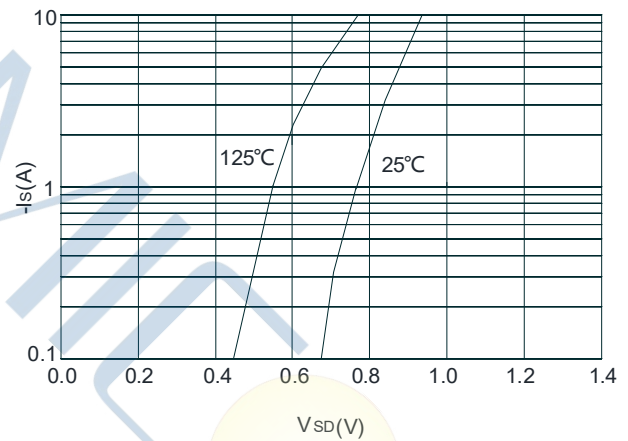


Figure 5 : Capacitance Characteristics


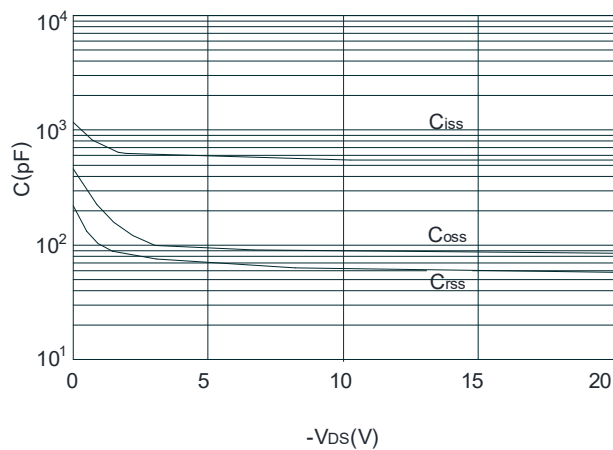


Figure 6 : Gate Charge Characteristics

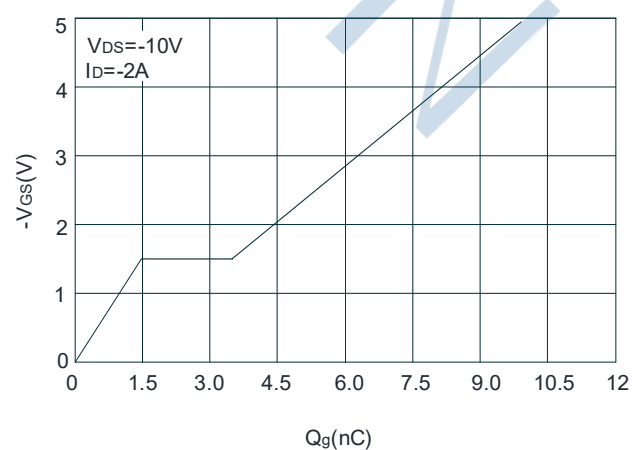

Typical Performance Characteristics

Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

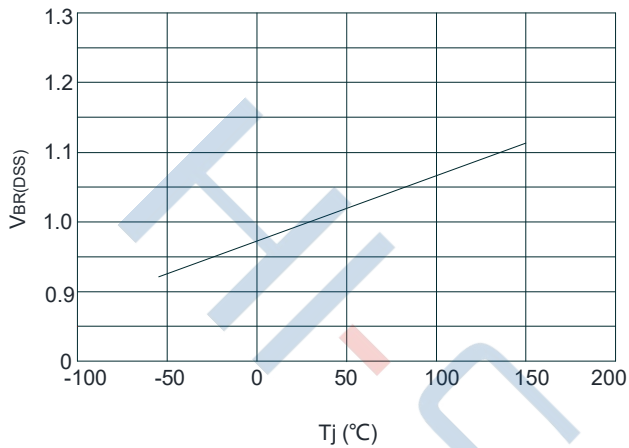


Figure 8: Normalized on Resistance vs. Junction Temperature

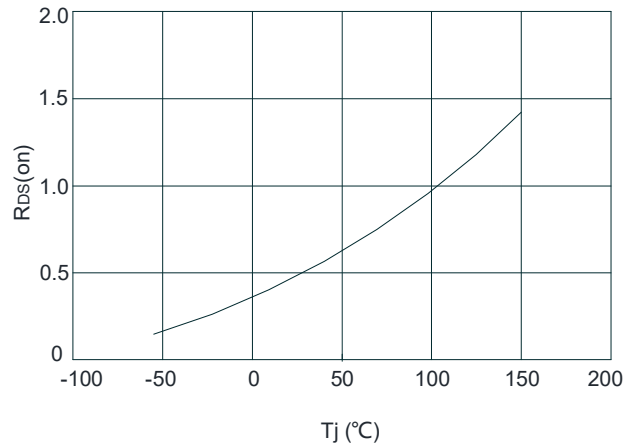


Figure 9: Maximum Safe Operating Area



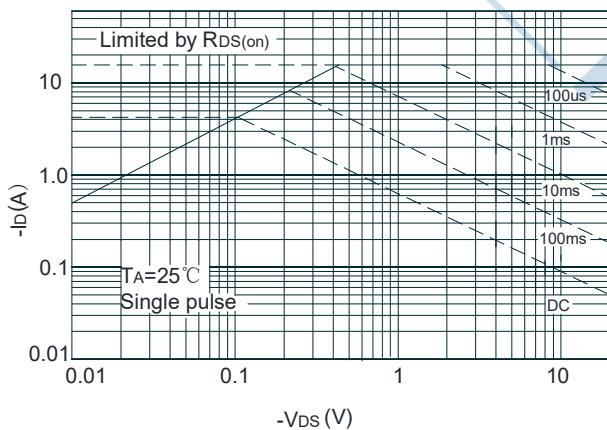


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature

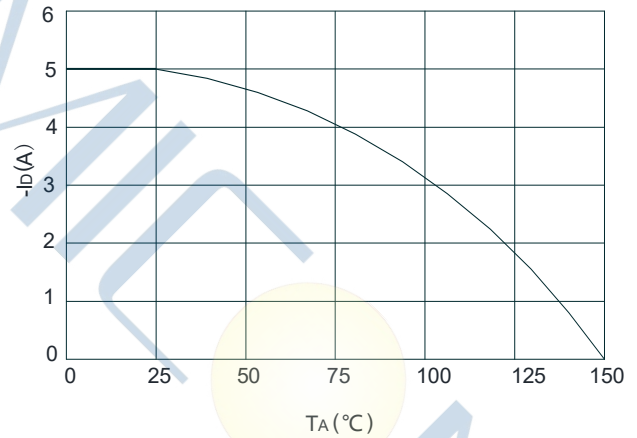


Test Circuit


Gate Charge Test Circuit & Waveform

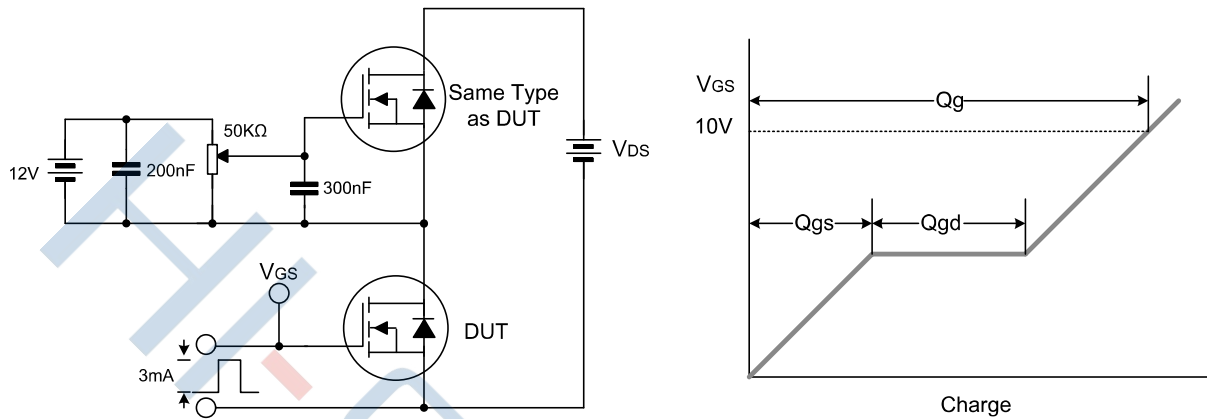

Resistive Switching Test Circuit & Waveform

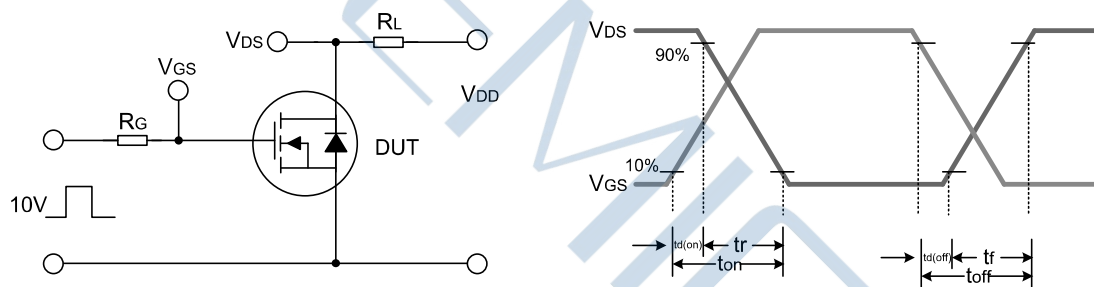


Unclamped Inductive Switching Test Circuit & Waveform

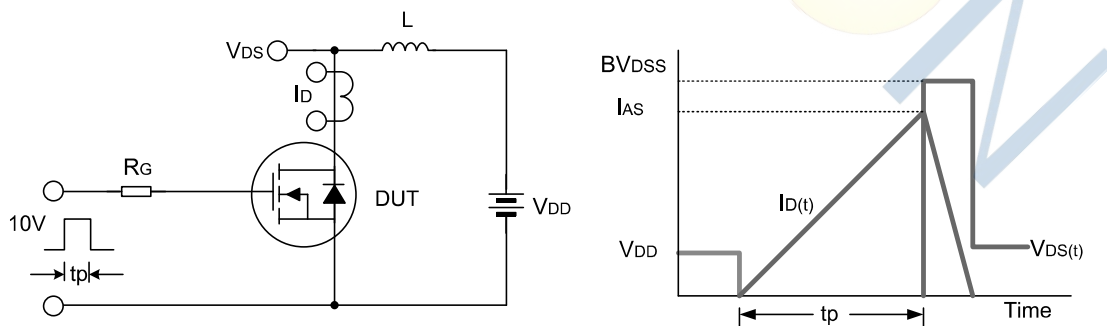


Package Dimensions of DFN2*2


Unit:mm

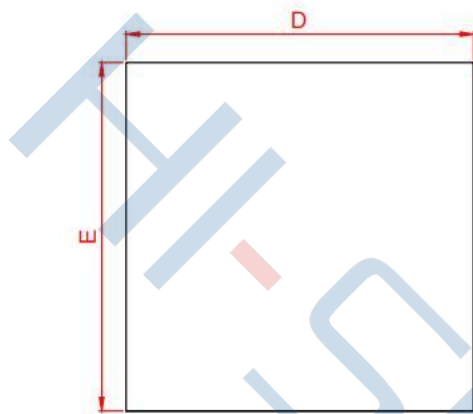

TOP VIEW

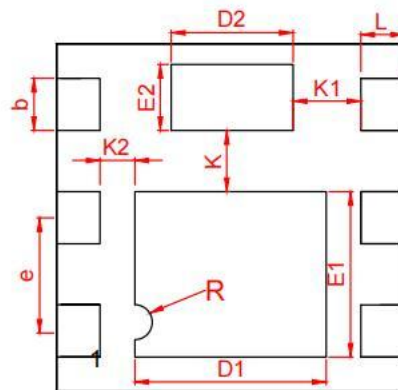

BOTTOM VIEW

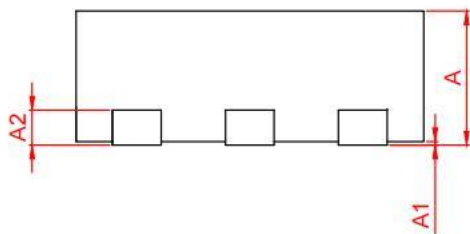

SIDE VIEW

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
*A1	0.00	0.02	0.05
*b	0.25	0.30	0.35
*A2	0.203 BSC		
*D	1.90	2.00	2.10
*E	1.90	2.00	2.10
*E1	0.90	0.95	1.00
*E2	0.33	0.38	0.43
*D1	1.10	1.15	1.20
*D2	0.65	0.70	0.75
*e	0.65 REF		
*L	0.22	0.25	0.27
*K	0.30	0.35	0.40
*K1	0.35	0.40	0.45
*K2	0.18	0.20	0.22

Disclaimer:

- ▶ Hi-semicon reserves the right to make changes to the information herein for the improvement of the design and performance without further notice! Customers should obtain the latest relevant information before placing orders and should verify that such information is complete and current.
- ▶ All semiconductor products malfunction or fail with some probability under special conditions. When using Hi-semicon products in system design or complete machine manufacturing, it is the responsibility of the buyer to comply with the safety standards strictly and take essential measures to avoid situations in which a malfunction or failure of such Hi-semicon products could cause loss of body injury or damage to property.
- ▶ Hi-semicon will supply the best possible product for customers!